


PHVB1010

IP67

IK08

24V



Key Features

- Minimum bend diameter - 100mm
- Ambient working temperature: (-)40°C to (+)55°C
- Bending Direction - Vertical
- Incremental Order Length (Monochrome) - 83.3


Connectors

Direct Entry (DE)

Left Side Entry (SL)

Right Side Entry (SR)

Bottom Entry (BE)

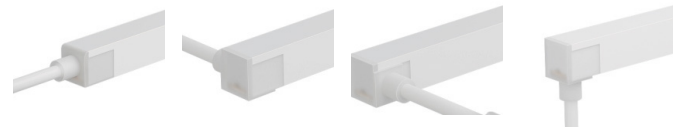

Mounting Accessories


Aluminium Profile



Flange Aluminium




Serrated Aluminium



Flange Serrated Aluminium



Bendable Serrated Aluminium



Pivot Bracket



Rotary Locking



Wall Mount




Recessed



Pendant Wire



Accessory Dimensions

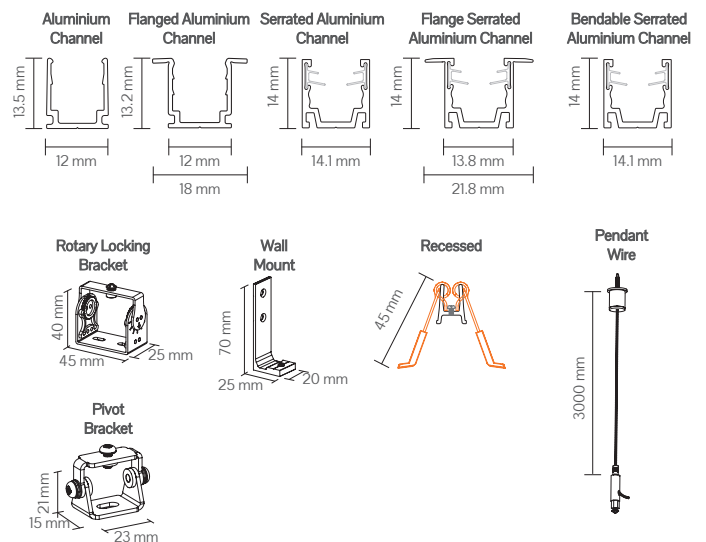

Code

Example:

PHVB1010 - 0580DEDO - 2400

Code	Wattage (W/m)		CRI		CCT			lm/m		Connector		Driver		Length
PHVB1010	05	4.5	80	CRI>80	22	2200K	195	DE	Direct Entry	DO	Non-Dim	-xxxx		
	09	9	90	CRI>90###	27	2700K	220	SL	Left side entry	DA	DALI			
					30	3000K	220	SR	Right side entry	CA	Casambi			
					35	3500K	220	BE	Bottom Entry	SW	Switch Dim			
					40	4000K	220			PH	Phase Dim			
					57	5700K	220							

Lumen/m figures based on, CRI>80.

HAWKO Lighting reserve the right to change any data without notification.

CRI>90 only in 4.5W/m in 2700K, 3000K, 3500K, 4000K

If this fitting needs to be adjusted on site, contact FOS Lighting before cutting the product

HAWKO Lighting - Neon Flex Range - 2023