


PHHB1229


IP68	IK08	24V	5 YR WARRANTY
------	------	-----	---------------------

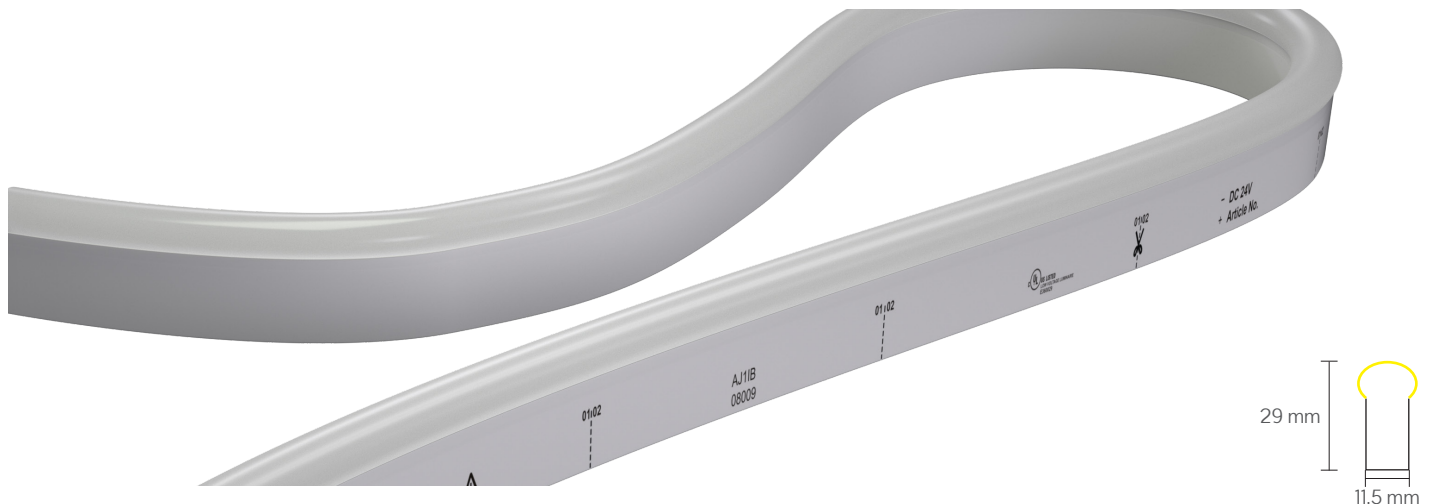


Key Features

- Minimum bend diameter - 120mm
- Ambient working temperature: (-)40°C to (+)55°C
- Bending Direction - Horizontal Bending
- Incremental Order Length (Monochrome) - 83.3mm
- Incremental Order Length (Tunable white / Dim to Warm) - 83.3mm
- Incremental Order Length (RGB / RGBW) - 100mm
- DMX Pixel Light options available on request


Connectors

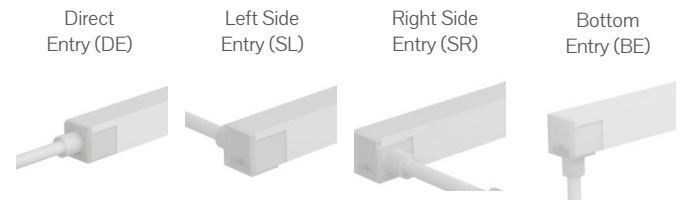

Mounting Accessories

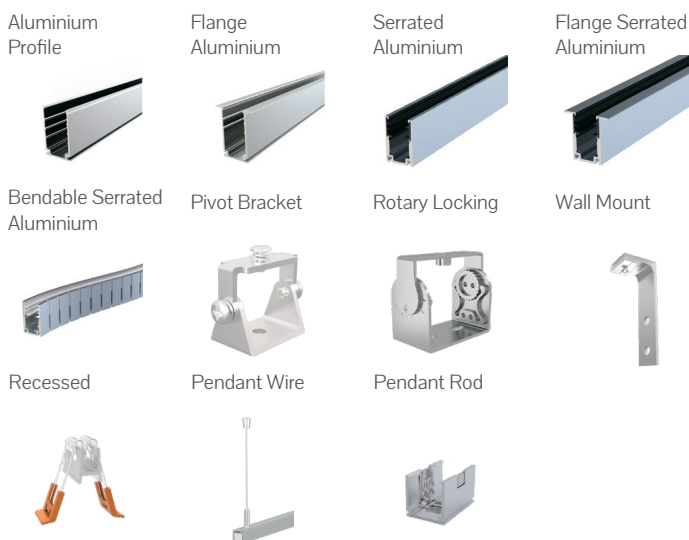

Accessory Dimensions

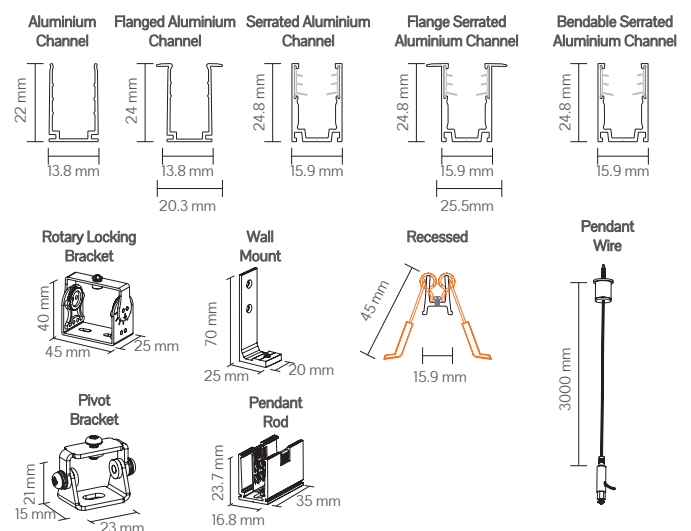

Code

Example:

PHHB1229 - 068022DEDO - 2400

Code	Wattage (W/m)	CRI	CCT	lm/m	Connector	Driver	Length
PHHB1229	06 6 09 9 12 12 15 15	80 CRI>80 90 CRI>90###	22 2200K 27 2700K 30 3000K 35 3500K 40 4000K 57 5700K TW 2200K-5700K DW 1800K-3000K RGB RGB R2 RGBW (2700K) R3 RGBW (3000K) R4 RGBW (4000K)	380 470 470 470 470 470	DE Direct Entry SL Left side entry SR Right side entry BE Bottom Entry	DO Non-Dim DA DALI CA Casambi SW Switch Dim PH Phase Dim RC 2.4Ghz Remote Control	-xxxx

Lumen/m figures based on, 12W, CRI>80.

HAWKO Lighting reserve the right to change any data without notification.

CRI>90 only in 12W/m in 2700K, 3000K, 3500K, 4000K

If this fitting needs to be adjusted on site, contact FOS Lighting before cutting the product

HAWKO Lighting - Neon Flex Range - 2023