




FABULOUS EXTERIOR


CATALOGUE

Visual Index

Bollards

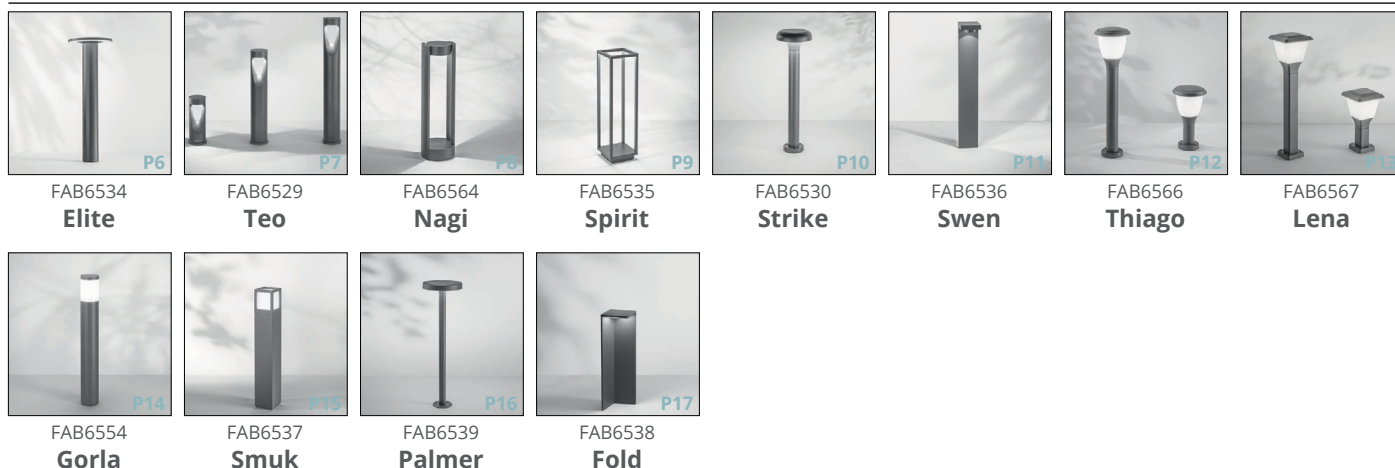


Wall Lamps

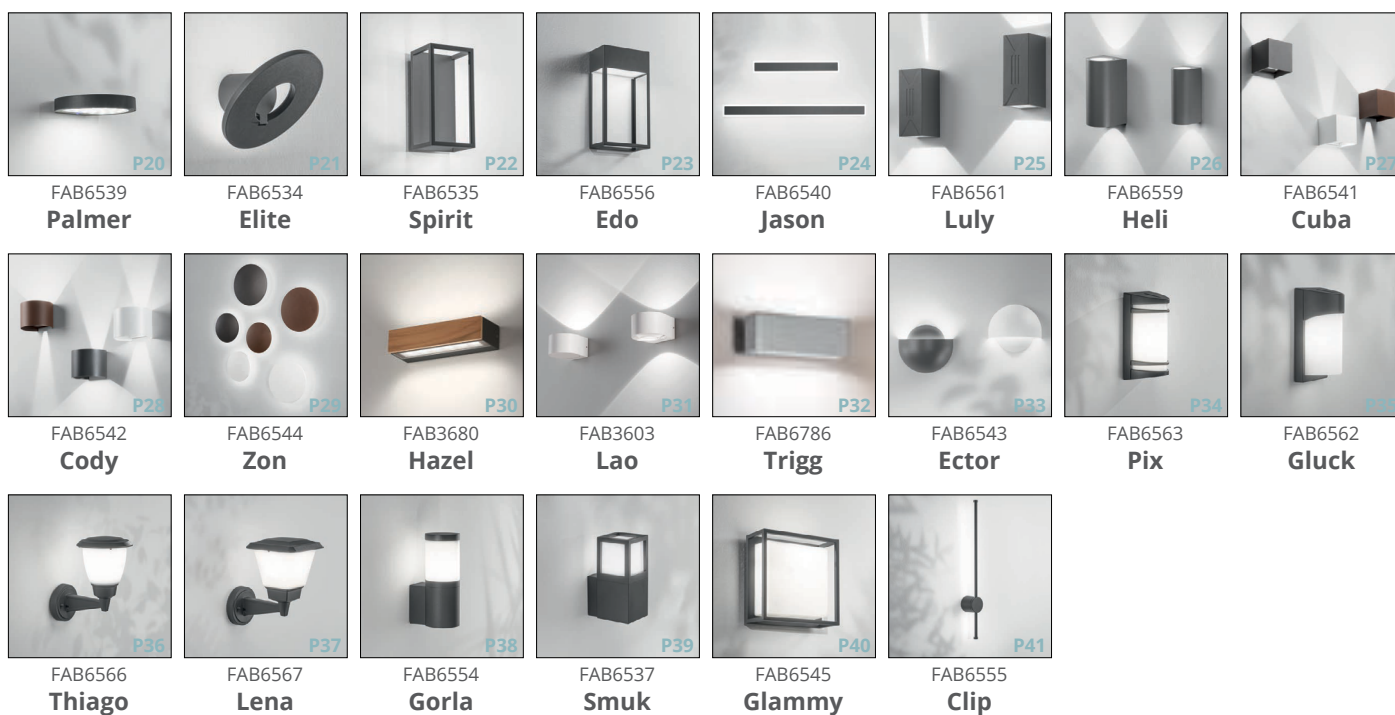

Step Lights



Ceiling Lamps

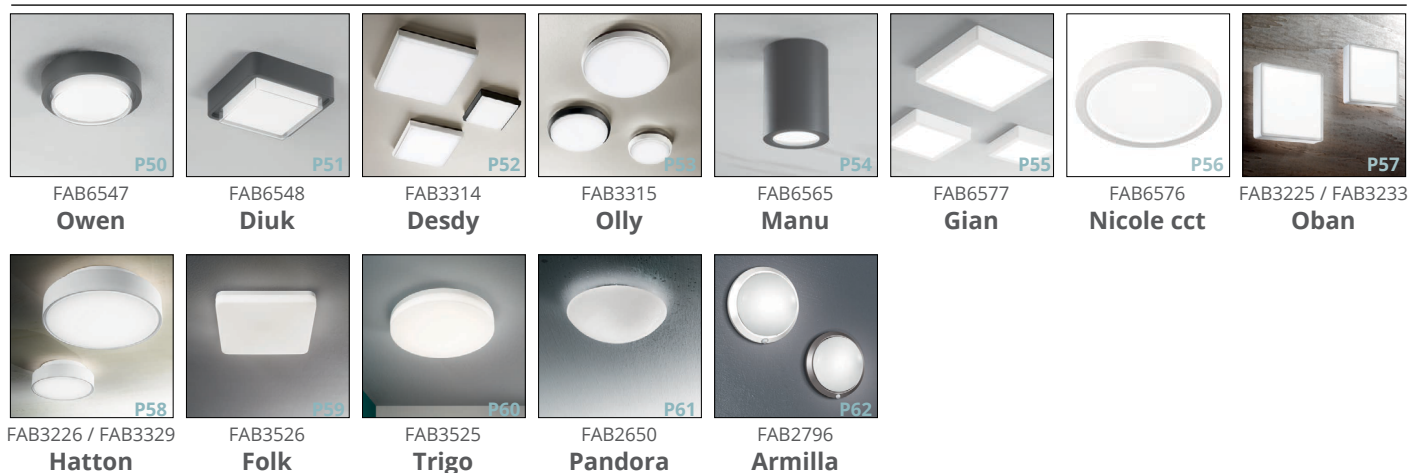


Inground Spots



Spike



Portable

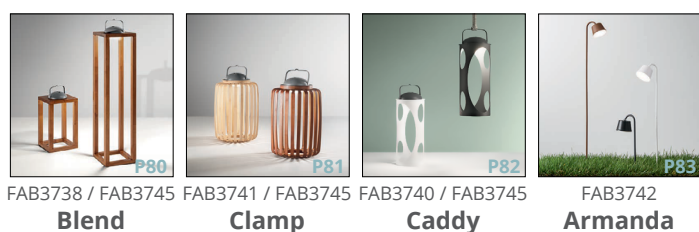

Bollards


Elite - FAB6434
Teo - FAB6529
Nagi - FAB6564
Spirit - FAB6535
Strike - FAB6530
Swen - FAB6536
Thiago - FAB6566
Lena - FAB6567
Gorla - FAB6554
Smuk - FAB6537
Palmer - FAB6539
Fold - FAB6538

Elite

FAB6534



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 Hz	SMD	-20° to +45°C	Included	2.1kg	310x310x715 3.95kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6534-10-294	Dark Grey	10W	3000K	1309	799	83

CE

IP54

IK05

A

↑

G

D

Energy Class

Teo

FAB6529

Aluminium Structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 HZ	COB	-20° to +45°C	Included	1.29kg	125x125x320 1.47kg




Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6529-11-204	Shiny Black	13W	3000K	1170	670	>80

100-240V AC 50/60 HZ	COB	-20° to +45°C	Included	2kg	125x125x620 2.3kg
-------------------------	-----	---------------	----------	-----	----------------------


Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6529-10-204	Shiny Black	13W	3000K	1170	620	>80

100-240V AC 50/60 HZ	COB	-20° to +45°C	Included	2.33kg	125x125x820 1.67kg
-------------------------	-----	---------------	----------	--------	-----------------------

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6529-12-204	Shiny Black	13W	3000K	1170	690	>80









Nagi


FAB6564

Aluminium s tructure

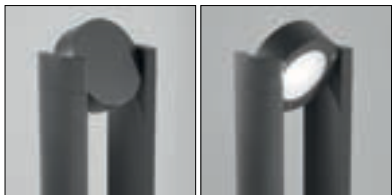

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	COB	-20° to +45°C	Included	2.10kg	175x175x535 2.95kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6564-10-294	Dark Grey	9W	3000K	722	354	83



Spirit

FAB6535

ALuminium Structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-20° to +45°C	Inlcuded	1.08kg	165x165x535 1.5kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6535-10-294	Dark Grey	7W	3000K	978	200	82







Energy Class

Strike

FAB6530

Aluminium structure

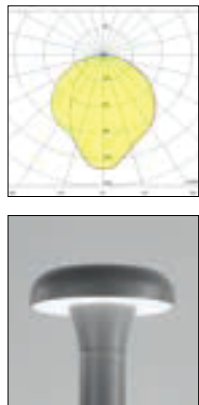

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
110-240V AC 50/60 HZ	SMD	-20° to +45°C	Included	1.48kg	185x185x635 1.78kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6530-10-294	Dark Grey	12W	3000K	1704	580	>80

IP65

IK08

A

↑

G


E

Energy Class

Swen

FAB6536

Aluminium structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	
100-240V AC 50/60 HZ	COB	-20° to +45°C	Included	1.6kg	155x135x685 2.43kg	
Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6536-10-294	Dark Grey	9W	3000K	680	350	83

CE

IP54

IK05

A

↑

G


F

Energy Class

Thiago

FAB6566

Aluminium & polycarbonate structure



Input Voltage	Lamp	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	1.33kg	175x175x620 1.73kg

Code	Finish	Power	Lumens (source)
FAB6566-10-294	Dark Grey	Max 1x15W	-

Max 250V	E27	-20° to +45°C	0.93kg	175x175x320 1.21kg
----------	-----	---------------	--------	-----------------------



Code	Finish	Power	Lumens (source)
FAB6566-11-294	Dark Grey	Max 1x15W	-



Lena

FAB6567

Aluminium & polycarbonate structure



Input Voltage	Lamp	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	1.68kg	175x175x620 2.07kg

Code	Finish	Power	Lumens (source)
FAB6567-10-294	Dark Grey	Max 1x15W	-

Max 250V	E27	-20° to +45°C	1.09kg	175x175x320 1.35kg
----------	-----	---------------	--------	-----------------------

Code	Finish	Power	Lumens (source)
FAB6567-11-294	Dark Grey	Max 1x15W	-

CE


IP65

IK08

Gorla

FAB6554

Aluminium & polycarbonate structure




Input Voltage	Lamp	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	1.3kg	115x115x675 1.95kg
Code	Finish	Power	Lumens (source)	
FAB6554-10-294	Dark Grey	Max 1x15W	-	



Smuk

FAB6537

Aluminium structure



Input Voltage	Lamp	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	2.5kg	115x115x665 3.13kg
Code	Finish	Power	Lumens (source)	
FAB6537-10-294	Dark Grey	Max 1x20W	-	

CE


IP54

IK05

Palmer

FAB6539

Aluminium structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	Charge	Work Time
3.7 VDC (Li-ion Battery)	SMD	0° to +45°C	Included	1.23kg	220x220x670 2.13kg	5-7 h	2.5 h (100%) 22 h (15%)

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6539-10-299	Dark Grey	2.7W	3000K	383	246	81

CE

III

IP54

IK05

Spike included

Twilight Sensor (20 lux)

Motion Sensor

A↑G



E

Energy Class

Fold

FAB6538

Aluminium structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	Charge	Work Time
3.7 VDC (Li-ion Battery)	SMD	0° to +45°C	Included	2.65kg	165x165x535 3.6kg	6-8 h	3 h (100%) 24 h (15%)

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6538-10-299	Dark Grey	2.7W	3000K	388	185	81

CE

III

IP54

IK05

Spike included

Twilight Sensor (20 lux)

Motion Sensor

A ↑ G

D

Energy Class

Wall Lamps

Palmer - FAB6539

Elite - FAB6534

Spirit - FAB6535

Edo - FAB6556

Jason - FAB6540

July - FAB6561

Heli - FAB6559

Cuba - FAB6541

Cody - FAB6542

Zon - FAB6544

Hazel - FAB3680

Lao - FAB3606

Trigg - FAB6786

Ector - FAB6543

Pix - FAB6563

Gluck - FAB6562

Thiago - FAB6566

Lena - FAB6567

Gorla - FAB6554

Smuk - FAB6537


Glammy - FAB6545

Clip - FAB6555


Palmer

FAB6539

Aluminium & polycarbonate structure

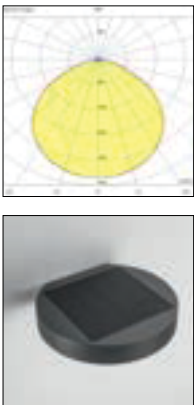

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	Charge	Work Time
3.7 VDC (Li-ion Battery)	SMD	0° to +45°C	Incldued	0.76kg	210x50x205 1.04kg	6-8 h	3 h (100%) 24 h (15%)



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6539-21-299	Dark Grey	2.7W	3000K	385	276	81





Twilight
Sensor (20 lux)



Motion
Sensor







Energy
Class

Elite

FAB6534

Aluminium & polycarbonate structure

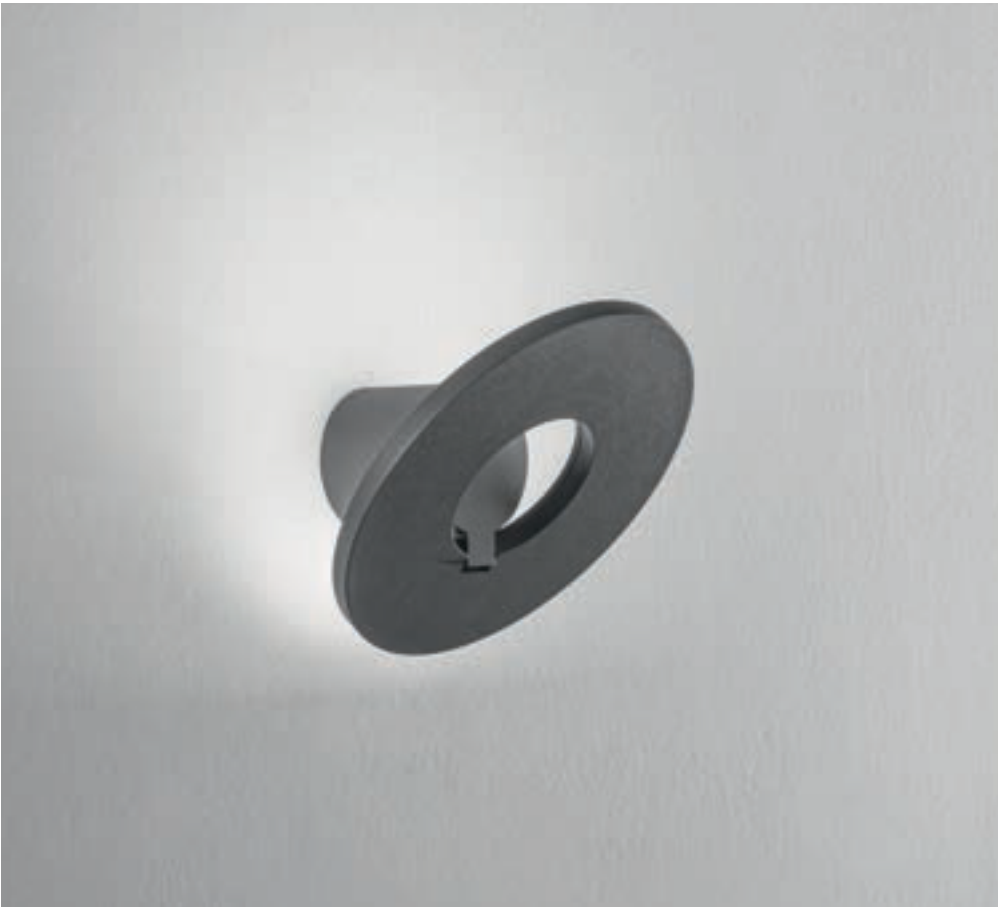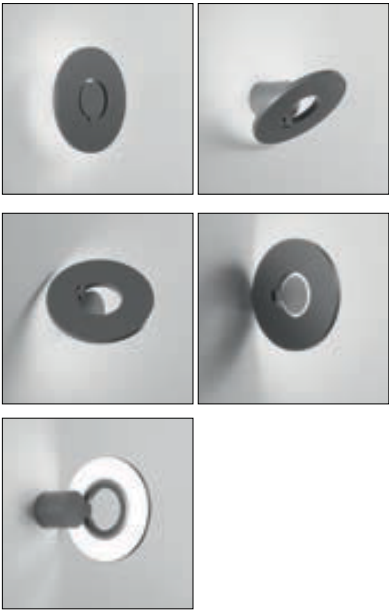

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 HZ	SMD	-20° to +45°C	Included	0.93 kg	290x142x290 1.43 kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6534-21-294	Dark Grey	10W	3000K	1309	832	83








Energy Class

Spirit

FAB6535

Aluminium & polycarbonate structure

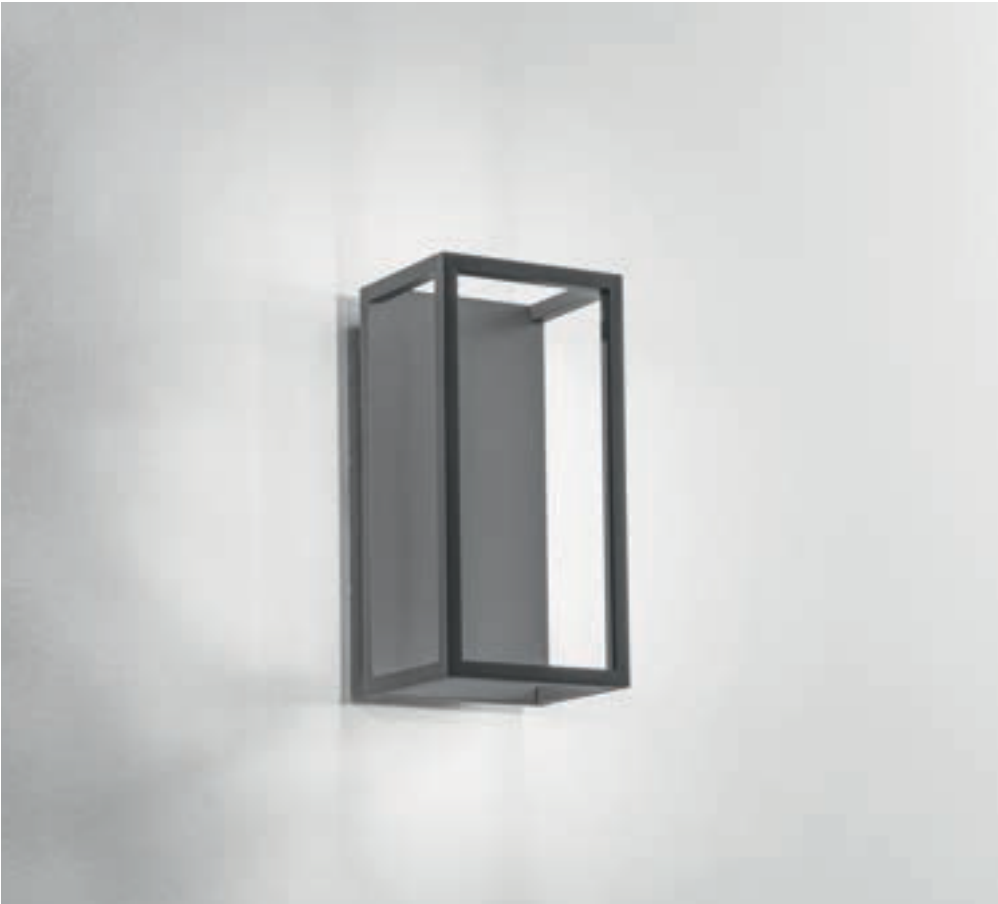

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-20° to +45°C	Included	0.9 kg	155x145x275 1.2 kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6535-21-294	Dark Grey	8W	3000K	1022	292	83



A

↑

G



D

Energy Class

Edo

FAB6556

Aluminium & polycarbonate structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-5° to +45°C	Included	0.85 kg	165x95x310 1.13 kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3556-21-294	Anthracite	20W	3000K	2396	1381	94

CE

IP65

IK06

A↑G



D

Energy Class

Jason

FAB6540

Aluminium & methacrylate structure

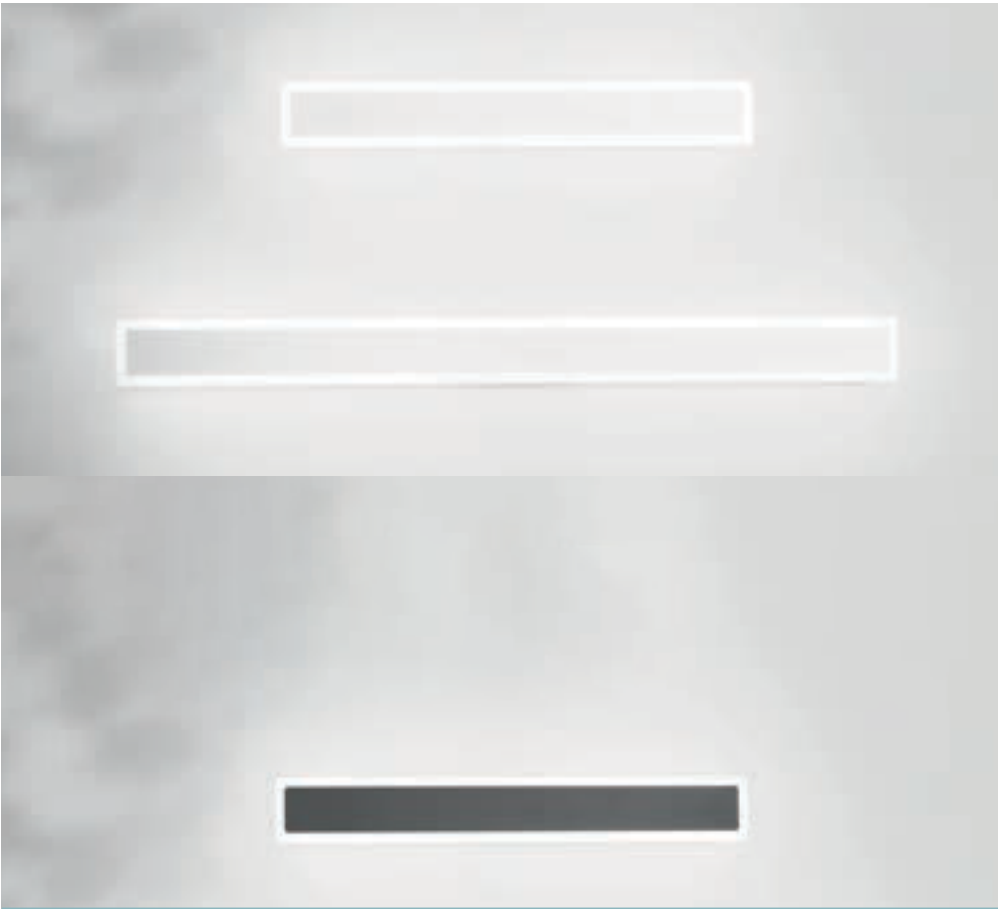
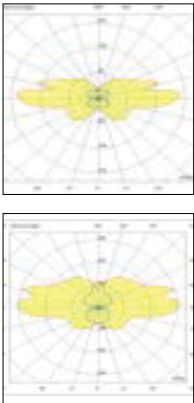


Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-5° to +45°C	Included	1.3 kg	665x110x80 1.55 kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6540-21-254	White	17W	3000K	1796	1390	91
FAB6540-21-294	Dark Grey	17W	3000K	1796	1339	91

220-240V AC 50/60 HZ	SMD	-5° to +45°C	Included	1.9 kg	1065x110x80 2.25 kg
-------------------------	-----	--------------	----------	--------	------------------------

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6540-22-254	White	22W	3000K	2993	2235	91
FAB6540-22-294	Dark Grey	22W	3000K	2993	2235	91





A

↑

G




D

Energy Class

Luly

FAB6561

Aluminium structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-20° to +45°C	Included	0.58 kg	80x75x165 0.63 kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6561-22-094	Dark grey	6W	3000K	500	170	>80
FAB6561-22-794	Dark grey	6W	3000K	500	284	>80

CE

IP65

IK06

A

↑

G


F

Energy Class

Heli

FAB6559

Aluminium structure

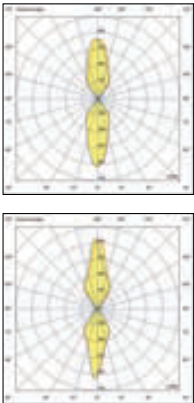

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	
100-240V AC 50/60 HZ	COB	-20° to +45°C	Included	0.46 kg	80x75x165 0.5 kg	
Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6559-22-294	Dark Grey	6W	3000K	780	597	>80

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	
100-240V AC 50/60 HZ	COB	-20° to +45°C	Included	0.78 kg	110x110x210 0.84 kg	
Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6559-26-294	Dark Grey	12W	3000K	1416	1140	>80

CE

IP54

IK06

A

↑

G

E

A

↑

G

F


Energy Class
6559-22-294

Energy Class
6559-26-294


Cuba

FAB6541

Aluminium structure with adjustable beam angle

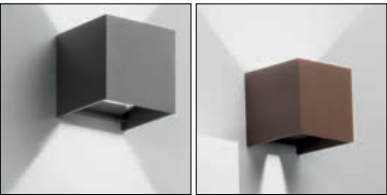

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	COB	-5° to +45°C	Included	0.5 kg	110x110x110 0.6 kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6541-21-294	Dark Grey	12W	3000K	1448	685	83
FAB6541-21-254	White	12W	3000K	1448	685	83
FAB6541-21-284	Corten	12W	3000K	1448	685	83

CE

IP54

IK03

A

↑

G

D

Energy Class


Cody

FAB6542

Aluminium structure, adjustable beam angle



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	COB	-5° to +45°C	Included	0.55 kg	150x120x110 0.65 kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6542-21-294	Dark Grey	12W	3000K	1448	685	83
FAB6542-21-254	White	12W	3000K	1448	685	83
FAB6542-21-284	Corten	12W	3000K	1448	685	83






Energy Class

Zon


FAB6544

Aluminium & polycarbonate structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-5° to +45°C	Included	0.73 kg	190x195x50 0.88 kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6544-21-294	Dark Grey	9W	3000K	1017	672	91
FAB6544-21-254	White	9W	3000K	1017	672	91
FAB6544-21-284	Corten	9W	3000K	1017	672	91



220-240V AC 50/60 HZ	SMD	-5° to +45°C	Included	1.2kg	190x195x50 0.88 kg
-------------------------	-----	--------------	----------	-------	-----------------------

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6544-22-294	Dark Grey	9W	3000K	1356	816	91
FAB6544-22-254	White	9W	3000K	1356	816	91
FAB6544-22-284	Corten	9W	3000K	1356	816	91



A

↑

G



D

Energy Class

Hazel

FAB3680

Metal & wood frames and plate glass



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-10° to +40°C	Included	0.93 kg	250x140x125 1.16 kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3680-22-165	Teak Wood	13W	3000K	1250	809	>80

220-240V AC 50/60 HZ	SMD	-10° to +40°C	Included	0.93 kg	250x140x125 1.16 kg
-------------------------	-----	---------------	----------	---------	------------------------

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3680-29-165	Teak Wood	20W	3000K	2350	1030	>80



A

↑

G

F

Energy Class
3680-22-165

A

↑

G

E

Energy Class
3680-29-165


Lao

FAB3603


Aluminium frame & crystal glass



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	COB	-10° to +40°C	Included	0.85 kg	150x160x160 0.95 kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3603-21-101	Black	6W	3000K	540	509	>80
FAB3603-21-102	White	6W	3000K	540	509	>80



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3603-22-101	Black	12W	3000K	1080	1021	>80
FAB3603-22-102	White	12W	3000K	1080	1021	>80



A

↑

G


E

Energy Class

Trigg



FAB6786

Aluminium structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-10° to +35°C	Included	0.7 kg	75x190x80 0.8 kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6786-02-844	Silver	14W	3000K	1300	920	>80
FAB6786-02-854	White	14W	3000K	1300	920	>80




Ector

FAB6543

Aluminium & polycarbonate structure

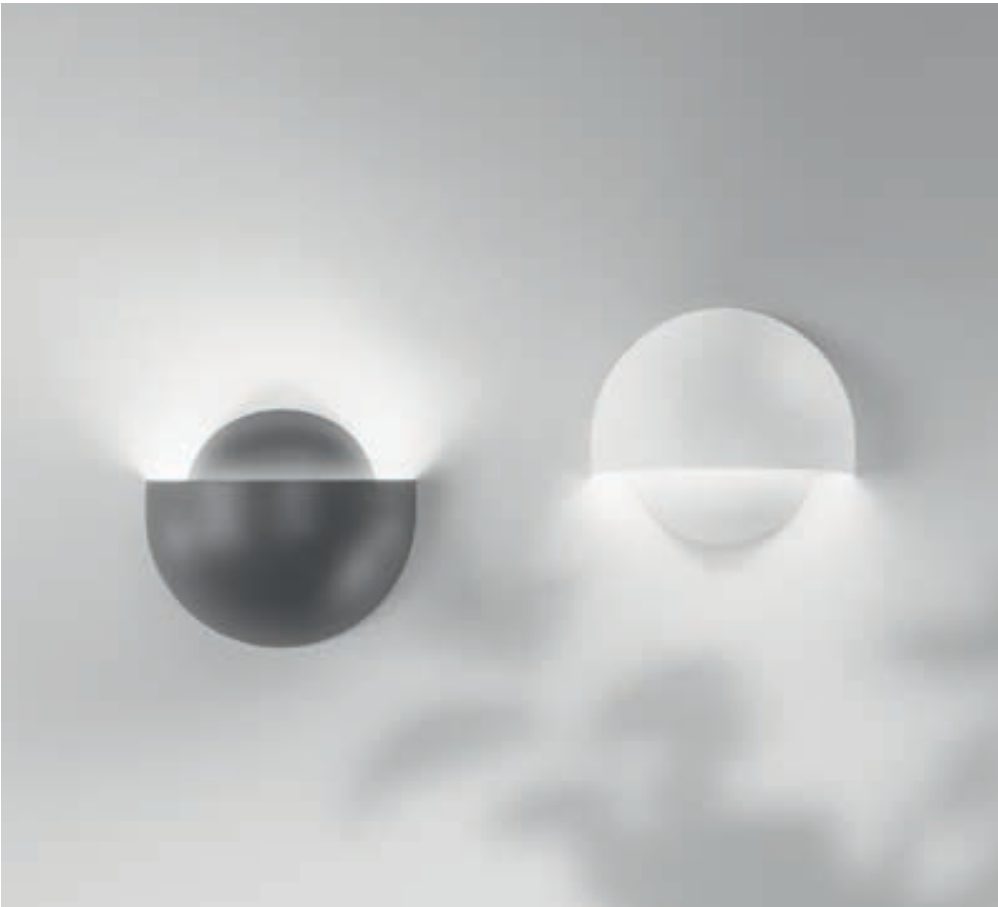

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-5° to +45°C	Included	0.62 kg	180x160x70 0.77 kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6543-21-254	White	10W	3000K	990	858	>80
FAB6543-21-294	Dark Grey	10W	3000K	990	805	>80

A

↑

G


D

Energy Class

Pix

FAB6563

Aluminium & polycarbonate structure



Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	0.9kg	135x120x275 1.01 kg

Code	Finish	Power	Lumens (source)
FAB6563-21-294	Dark Grey	Max 1x15W	-


IP54

IK08

Gluck

FAB6562

Aluminium & polycarbonate structure



Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	0.83kg	135x120x275 0.94 kg
Code	Finish	Power	Lumens (source)	
FAB6562-21-294	Dark Grey	Max 1x15W	-	

CE

IP54

IK08


Thiago

FAB6566

Aluminium & polycarbonate structure



Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	0.98kg	250x170x305 1.31 kg



Code	Finish	Power	Lumens (source)
FAB6566-21-294	Dark Grey	Max 1x15W	-




Lena

FAB6567

Aluminium & polycarbonate structure



Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	0.96kg	265x175x285 1.25 kg



Code	Finish	Power	Lumens (source)
FAB6567-21-294	Dark Grey	Max 1x15W	-

CE


IP54

IK08

Gorla

FAB6554

Aluminium & polycarbonate structure




Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	0.9kg	155x115x265 1.28 kg
Code	Finish	Power	Lumens (source)	
FAB6554-21-294	Dark Grey	Max 1x15W	-	



Smuk

FAB6537

Aluminium & polycarbonate structure



Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	1.47kg	155x115x255 1.68kg
Code	Finish	Power	Lumens (source)	
FAB6537-21-294	Dark Grey	Max 1x15W	-	


IP54

IK08

Glammy

FAB6545

Aluminium & polycarbonate structure



Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	1.28kg	280x155x285 1.98 kg
Code	Finish	Power	Lumens (source)	
FAB6545-21-294	Dark Grey	Max 2x15W	-	

CE



IP54

IK05

Clip

FAB6555

Aluminium & polycarbonate structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-5° to +45°C	Included	0.55 kg	120x110x700 0.81 kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6555-21-294	Dark Grey	12W	3000K	1650	890	93



A

↑

G

D

Energy Class



Step Lights

Glint - FAB6571
Dusk - FAB6572
Wink - FAB6573
Sway - FAB6574

Glint

FAB6571

Aluminium & plate glass structure

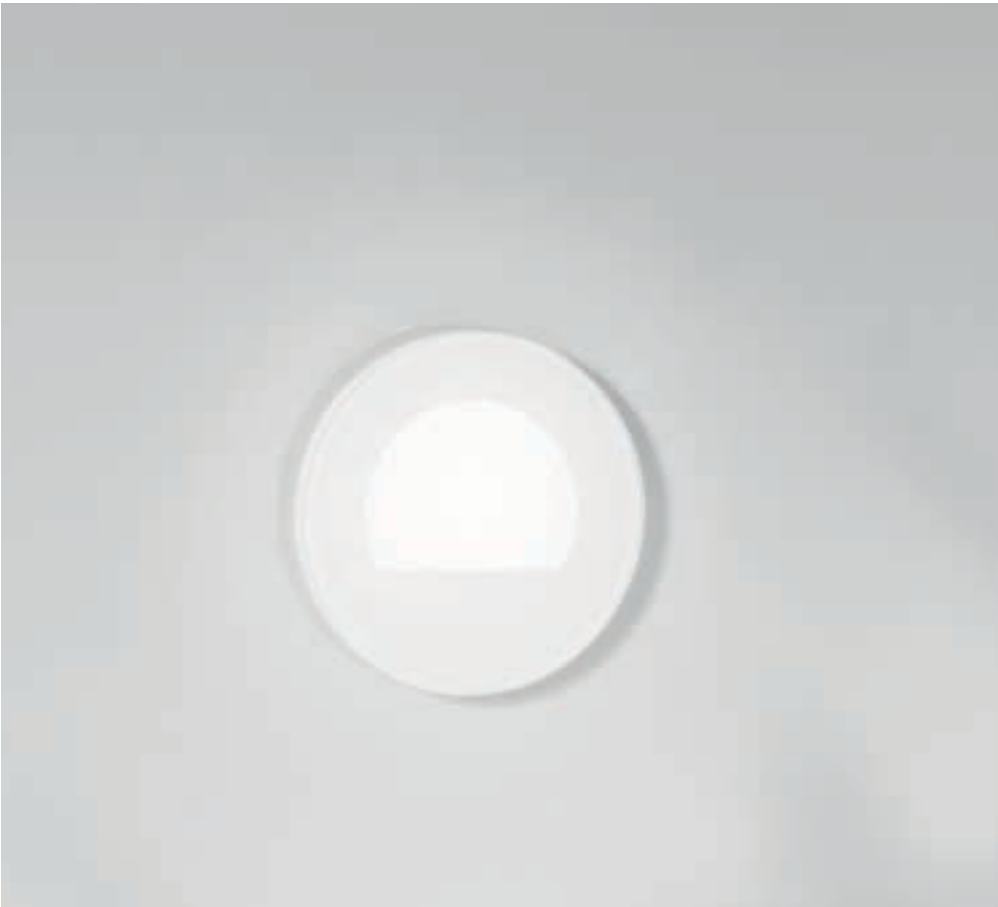

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
24VDC	SMD	-20° to +50°C	Not Included	0.2 kg	85x85x95 0.24 kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6571-02-254	White	2.2W	3000K	146	16	90
FAB6571-50-001	Outer Casing					

CE

IP65

IK06

A
↑
G



G

Energy Class

Dusk

FAB6572

Aluminium & plate glass structure

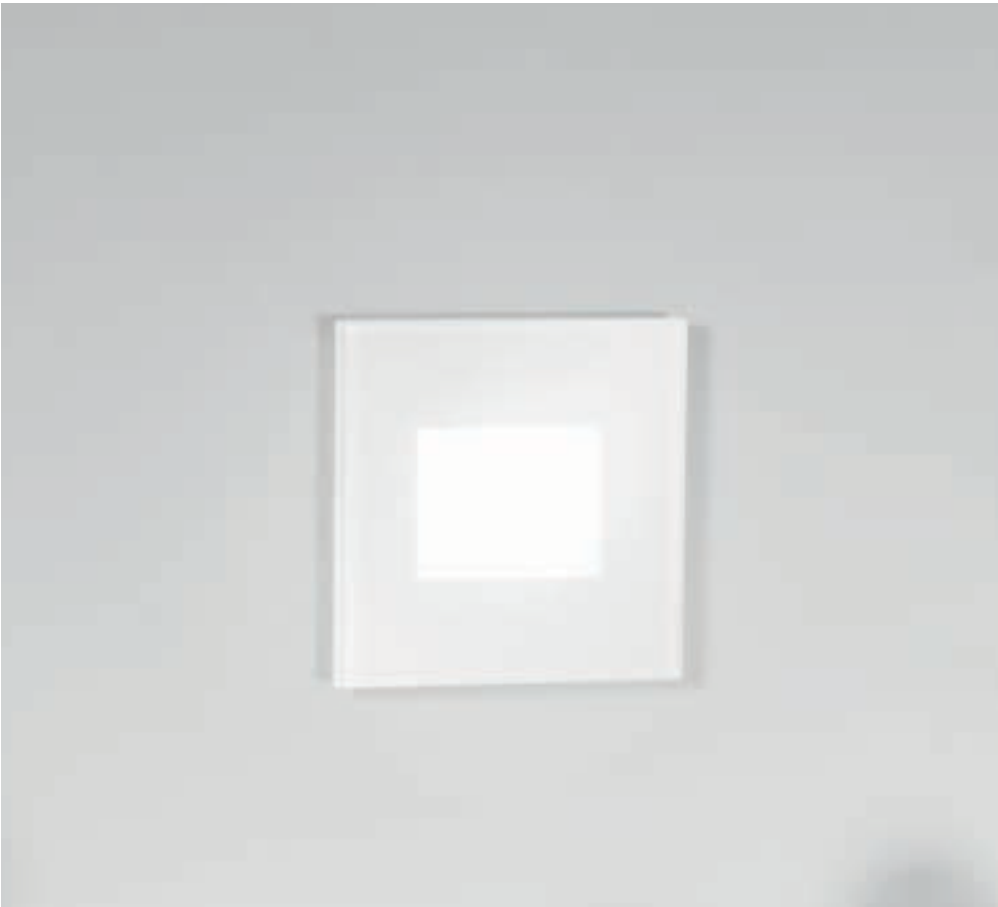

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
24 VDC	SMD	-20° to +50°C	Not Included	0.21 kg	85x85x95 0.24 kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6572-02-254	White	2.2W	3000K	146	18	90
FAB6571-50-001	Outer Casing					



A

↑

G

Energy Class


Wink

FAB6573


Die-casting structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	COB	-10° to +45°C	Included	0.32 kg	115x110x85 0.38 kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6573-02-294	Grey	3W	3000K	160	100	>80
FAB6573-02-254	White	3W	3000K	160	100	>80




Sway

FAB6574

Die-casting structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	COB	-10° to +45°C	Included	0.38 kg	115x110x85 0.38 kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6574-02-294	Grey	3W	3000K	160	100	>80
FAB6574-02-254	White	3W	3000K	160	100	>80

A

↑

G

F

Energy Class

Ceiling Lamps



Owen - FAB6547
Diuk - FAB6548
Desdy - FAB3314
Olly - FAB3315
Manu - FAB6565
Gian - FAB6577
Nicole cct - FAB6576
Oban - FAB3225
Oban - FAB3233

Hatton - FAB3226
Hatton - FAB3229
Folk - FAB3526
Trigo - FAB3525
Pandora - FAB2650
Armillar - FAB2796

Owen

FAB6547

Aluminium & polycarbonate structure




Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 HZ	SMD	-20° to +45°C	Included	1.2kg	235x80x235 1.31kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6547-61-294	Dark Grey	12W	3000K	1620	950	<>80

Diuk

FAB6548

Aluminium & polycarbonate structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 HZ	SMD	-20° to +45°C	Included	1.39kg	215x80x215 1.47kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6548-61-294	Dark Grey	12W	3000K	1620	980	>80









Energy Class

Desdy

FAB3314

Aluminium & polycarbonate structure

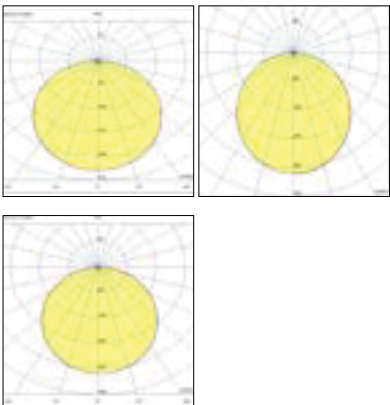

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 HZ	SMD	-10° to +40°C	Included	0.6kg	60x185x185 0.7kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3314-69-101	Black	10W	3000K	1050	867	>80
FAB3314-69-102	White	10W	3000K	1050	867	>80

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 HZ	SMD	-10° to +40°C	Included	1kg	60x255x255 1.1kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3314-61-101	Black	23W	3000K	2700	2272	>80
FAB3314-61-102	White	23W	3000K	2700	2272	>80

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 HZ	SMD	-10° to +40°C	Included	1.5kg	60x315x315 1.6kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3314-65-101	Black	30W	3000K	3220	2560	>80
FAB-3314-65-102	White	30W	3000K	3220	2560	>80



A
↑
G


F

Energy Class

olly

FAB3315

Aluminium & polycarbonate structure

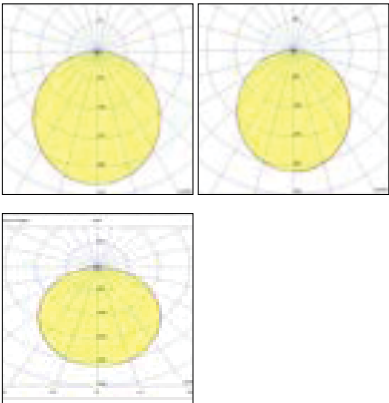

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 HZ	SMD	-10° to +40°C	Included	0.5kg	60x185x185 0.6kg




Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3315-69-101	Black	10W	3000K	1050	867	>80
FAB3315-69-102	White	10W	3000K	1050	867	>80

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 HZ	SMD	-10° to +40°C	Included	0.8kg	60x255x255 0.9kg


Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3315-61-101	Black	23W	3000K	2700	2272	>80
FAB3315-61-102	White	23W	3000K	2700	2272	>80

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 HZ	SMD	-10° to +40°C	Included	1.2kg	60x315x315 1.4kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3315-65-101	Black	30W	3000K	3220	2560	>80
FAB-3315-65-102	White	30W	3000K	3220	2560	>80








Manu

FAB6565

Aluminium structure




Input Voltage	Lamp	Ambient Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +45°C	0.8kg	125x125x180 0.88kg
Code	Finish	Power	Lumens (source)	
FAB6565-61-294	Dark Grey	Max 1x15W	-	




Gian

FAB6577

Aluminium structure

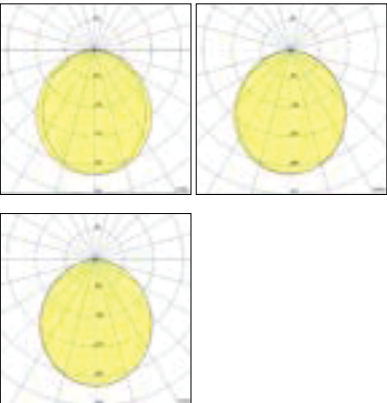


Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-10° to +45°C	Included	0.63kg	155x45x155 0.7kg




Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6577-61-254	Ivory white	12W	3000K	1344	960	>80

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-10° to +45°C	Included	0.9kg	190x45x190 1kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6577-65-254	Ivory white	18W	3000K	2295	1530	>80

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-10° to +45°C	Included	1.41kg	250x45x250 1.54kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6577-64-254	Ivory white	24W	3000K	3060	2040	>80

CE

IP54

IK07

A

↑

G


E

Energy Class

Nicole cct

FAB6576

Aluminium structure

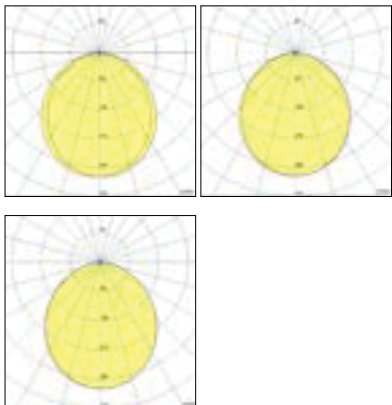


Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-10° to +45°C	Included	0.57kg	155x45x155 0.63kg




Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6576-61-254	Ivory white	8W	2700K/3000K/4000K	896	640	>80

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-10° to +45°C	Included	0.79kg	190x45x190 0.9kg




Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6576-65-254	Ivory white	14W	2700K/3000K/4000K	1785	1190	>80

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-10° to +45°C	Included	1.39kg	250x45x250 1.53kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6576-64-254	Ivory white	18W	2700K/3000K/4000K	2295	1530	>80







Oban

FAB3225 / FAB3233

Polycarboante structure




Input Voltage	Lamp	Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +40°C	0.73kg	100x250x250 0.9kg



Code	Finish	Power		
FAB3225-61-102	White	Max 1x42W		Motion sensor
FAB3233-61-102	White	Max 1x42W		

Input Voltage	Lamp	Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +40°C	1.04kg	100x310x310 1.26kg




Code	Finish	Power		
FAB3225-65-102	White	Max 2x30W		Motion sensor
FAB3233-65-102	White	Max 2x30W		

HATTON

FAB3226 / FAB3229

Polycarbonate structure





Input Voltage	Lamp	Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +40°C	0.6kg	100x250x250 0.76kg

Code	Finish	Power		
FAB3226-61-102	White	Max 1x42W		Motion sensor
FAB3229-61-102	White	Max 1x42W		

Input Voltage	Lamp	Operating Temperature	Net Weight	Package size
Max 250V	E27	-20° to +40°C	0.86kg	100x310x310 1.09kg


Code	Finish	Power		
FAB3226-65-102	White	Max 2x30W		Motion sensor
FAB3229-65-102	White	Max 2x30W		




Folk

FAB3526

Polycarbonate structure




Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-20° to +45°C	Included	0.9kg	295x75x300 1.2kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI	
FAB3526-61-102	White	27W	3000K	2500	1800	>80	
FAB3526-63-102	White	27W	3000K	2500	1800	>80	 Motion sensor







Trigo

FAB3525

Polycarbonate structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
220-240V AC 50/60 HZ	SMD	-20° to +45°C	Included	0.8kg	295x75x300 1.1kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI	
FAB3525-61-102	White	27W	3000K	2500	1800	>80	
FAB3525-63-102	White	27W	3000K	2500	1800	>80	Motion sensor

A

↑

G

F

Energy Class


Pandora

FAB2650

Metal frame and blown glass



Input Voltage	Lamp	Operating Temperature	Net Weight	Package size
Max 250V	E27	-10° to +45°C	1.39kg	140x360x360 1.9kg



Code	Finish	Power	Lumens (source)
FAB2650-61-102	White	Max 60W	-





IP44

IK03




Turn & Lock


Armilla

FAB2796

Polycarbonate structure



Input Voltage	Lamp	Operating Temperature	Net Weight	Package size
Max 250V	E27	-10° to +45°C	0.73kg	115x310x310 0.95kg



Code	Finish	Power	Lumens (source)
FAB2796-61-102	White	Max 60W	-
FAB2796-61-137	Silver	Max 60W	-



IP44

IK05





Motion Sensor



Turn & Lock

62 - HAWKO Lighting - Fabulous Exterior Range - 2024



Inground Spot

Tulip 2 - FAB6903

Naire 2 - FAB6904

Willy 2 - FAB6905

Apache 2 - FAB6906

Irving 2 - FAB6907

Wako 2 - FAB6908



Abilene 2 - FAB6909

Yuma 2 - FAB6910

Tulip 2

FAB6903

Driver-over spot light

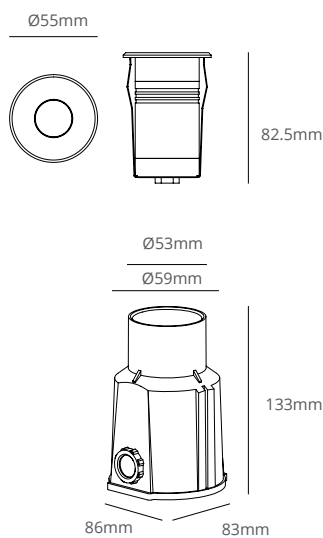

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	
220-240V AC 50/60 HZ	SMD	-20° to +40°C	Included	0.4kg	95x150x95 0.5kg	
Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6903-02-314	Stainless Steel	3W	3000K	175	152	82







Nair 2

FAB6904

Driver-over spot light

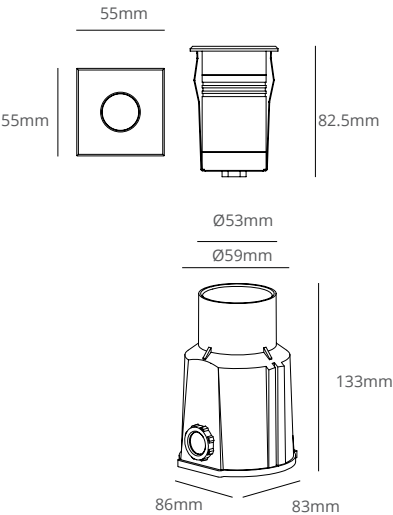

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	
220-240V AC 50/60 HZ	SMD	-20° to +40°C	Included	0.4kg	95x150x95 0.5kg	
Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6904-02-314	Stainless Steel	3W	3000K	175	152	82

IP67

IK08

1700kg
 Ø85

A

↑



G

Energy Class

Willy 2

FAB6905

Driver-over spot light

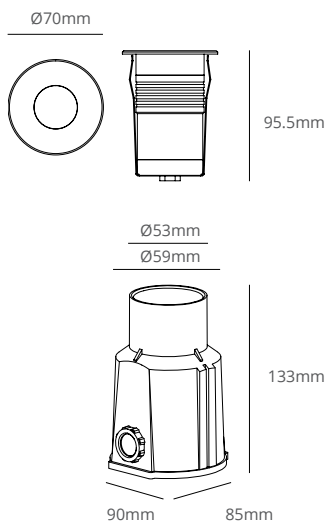

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	
220-240V AC 50/60 HZ	COB	-20° to +40°C	Included	0.5kg	95x150x95 0.6kg	
Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6905-02-414	Stainless Steel	6.5W	3000K	480	409	>80







Apache 2

FAB6906

Driver-over spot light

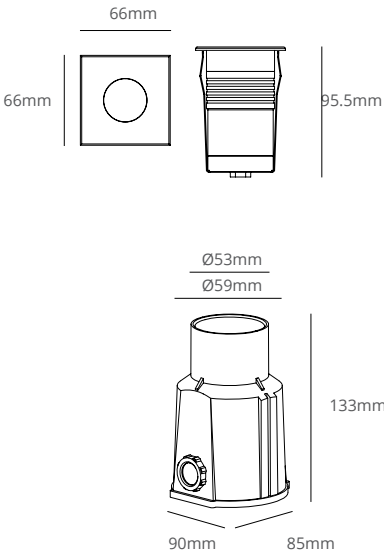

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	
220-240V AC 50/60 HZ	COB	-20° to +40°C	Included	0.6kg	95x150x95 0.7kg	
Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6906-02-414	Stainless Steel	6.5W	3000K	480	409	>80







Irving 2

FAB6907

Driver-over spot light

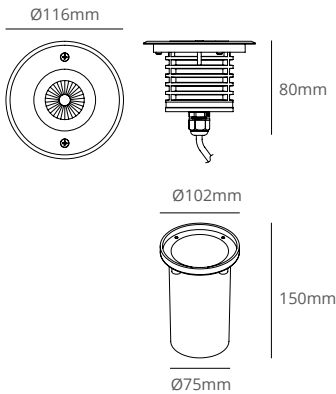



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	
220-240V AC 50/60 HZ	COB	-20° to +40°C	Included	0.8kg	125x170x125 1.0kg	
Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6907-02-414	Stainless Steel	7.8W	3000K	750	653	>80

Wako 2

FAB6908

Driver-over spot light

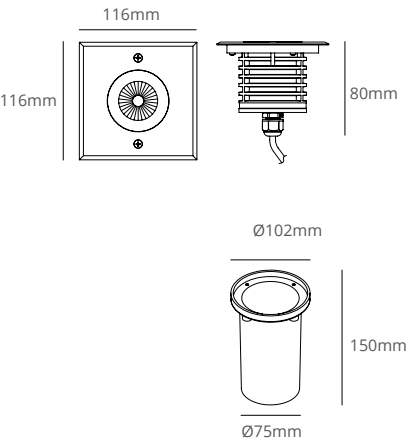

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	
220-240V AC 50/60 HZ	COB	-20° to +40°C	Included	0.8kg	125x170x125 1.0kg	
Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6908-02-414	Stainless Steel	7.8W	3000K	750	653	>80





2500kg



Ø102





Energy Class


Abilene 2

FAB6909

Driver-over spot light

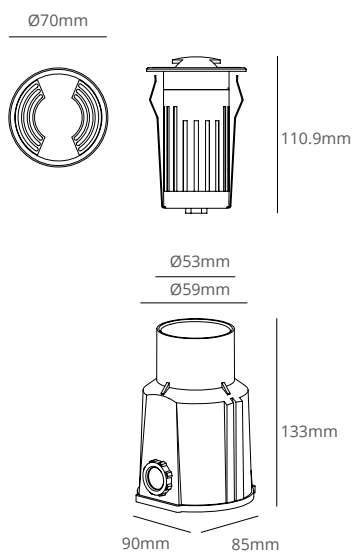


Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	
220-240V AC 50/60 HZ	SMD	-20° to +40°C	Included	0.5kg	150x95x95 0.6kg	
Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6909-02-024	Matt chrome	2.8W	3000K	125	9	>80



Yuma 2

FAB6910

Driver-over spot light

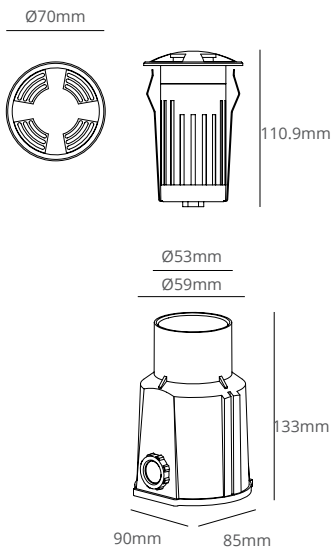

Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size	
220-240V AC 50/60 HZ	SMD	-20° to +40°C	Included	0.5kg	150x95x95 0.6kg	
Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6910-02-024	Matt chrome	2.8W	3000K	125	8.5	>80







Spike

Tuc - FAB6575
Boris - FAB6550

Tuc


FAB6575

Aluminium structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
24 VDC	COB	-10° to +45°C	Not included	0.48kg	105x55x210 0.65 kg



Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6575-71-294	Dark Grey	7W	3000K	640	467	90



Boris

FAB6550

Die-cast structure



Input Voltage	LED Type	Ambient Operating Temperature	Driver	Net Weight	Package size
100-240V AC 50/60 HZ	COB	-20° to +45°C	Included	0.7kg	155x95x200 0.82 kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB6550-71-294	Dark Grey	8W	3000K	700	640	>80

A
↑
G

F

Energy Class

Portable Lamps

Blend - FAB3738

Blend - FAB3745

Clamp - FAB3741

Clamp - FAB3745

Caddy - FAB3740



Caddy - FAB3745

Armanda - FAB3742

Blend

FAB3738 / / FAB3745

Metal frame & wood



Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
5V 2A	SMD	-20° to +35°C	1.76kg	480x265x265 2.19kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3738-30-130	Walnut	3W	3000K	320	210	>80

Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
5V 2A	SMD	-20° to +35°C	2.9kg	940x265x265 3.26kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3738-35-130	Walnut	3W	3000K	320	210	>80

Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
5V 2A	SMD	-20° to +35°C	0.55kg	120x120x200 0.69kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3745-50-282	Walnut	3W	3000K	320	210	>80





Clamp

FAB3741 / FAB3745

Metal frame & wood




Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
5V 2A	SMD	-20° to +35°C	1.02kg	510x300x300 1.6kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3741-30-130	Walnut	3W	3000K	320	210	>80
FAB3741-30-132	Ash Wood	3W	3000K	320	210	>80

Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
5V 2A	SMD	-20° to +35°C	0.55kg	120x120x200 0.69kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3745-50-282	Anthracite	3W	3000K	320	210	>80



CE

IP54

IK08

Dimmable

Touch Dimmer

Rechargeable

A

G


E

Energy Class

Caddy

FAB3740 / FAB3745

Aluminium structure



Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
5V 2A	SMD	-20° to +35°C	1.77kg	520x200x200 1.6kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3740-30-102	White	3W	3000K	320	210	>80
FAB3740-30-282	Anthracite	3W	3000K	320	210	>80

Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
5V 2A	SMD	-20° to +35°C	0.55kg	120x120x200 0.69kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3745-50-282	Anthracite	3W	3000K	320	210	>80



Dimmable



Touch Dimmer



Rechargeable



Energy Class

Armanda

FAB3742

Metal & polycarbonate frame



Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
5V 2A	SMD	-10° to +35°C	0.4kg	350x200x100 0.7kg




Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3742-72-101	Black	3W	3000K	320	210	>80
FAB3742-72-102	White	3W	3000K	320	210	>80
FAB3742-72-361	Cotren	3W	3000K	320	210	>80

Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
5V 2A	SMD	-10° to +35°C	0.61kg	360x150x150 0.85kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3742-71-101	Black	3W	3000K	320	210	>80
FAB3742-71-102	White	3W	3000K	320	210	>80
FAB3742-71-361	Cotren	3W	3000K	320	210	>80

Input Voltage	LED Type	Ambient Operating Temperature	Net Weight	Package size
5V 2A	SMD	-10° to +35°C	0.18kg	70x100x100 0.21kg

Code	Finish	Power	CCT	Lumens (source)	Lumens (Systems)	CRI
FAB3742-50-101	Black	3W	3000K	320	210	>80
FAB3742-50-102	White	3W	3000K	320	210	>80
FAB3742-50-361	Cotren	3W	3000K	320	210	>80





Queensland

Victoria

New South Wales

Western Australia

The Australian Capital Territory

Tasmania

www.hawko.com.au

info@hawko.com.au

(07) 5491 5800