


PHVB1617F




Key Features

- Minimum bend diameter - 300mm
- Ambient working temperature: (-)40°C to (+)55°C
- Bending Direction - Vertical
- Incremental Order Length (Monochrome) - 55.6mm
- Incremental Order Length (Tunable white) - 83.3mm
- Incremental Order Length (RGB / RGBW) - 83.3mm


Connectors



Mounting Accessories

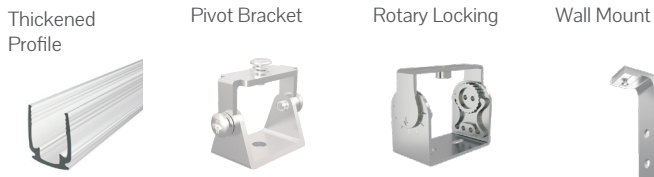

Accessory Dimensions

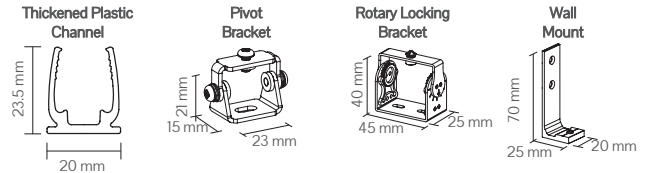

Code

Example: PHVB1617F - 128022DEDO - 2400

Code	Wattage (W/m)		CRI		CCT			Connector		Driver		Length
	12	12 W/m	80	90			lm/m					
PHVB1617F	12	12 W/m	80	CRI>80	22	2200K	850	DE	Direct Entry	DO	Non-Dim	-xxxx
					27	2700K	1050	SL	Left side entry	DA	DALI	
					30	3000K	1100	SR	Right side entry	CA	Casambi	
					35	3500K	1100	BE	Bottom Entry	SW	Switch Dim	
					40	4000K	1100		PH	Phase Dim		
					57	5700K	1100		RC	2.4Ghz Remote Control		
					TW	2200K-5700K						
					DW	1800K-3000K						
					RGB	RGB						
					R2	RGBW (2700K)						
					R3	RGBW (3000K)						
					R4	RGBW (4000K)						