

PHHB1010

IP67

IK08

24V



Key Features

- Minimum bend diameter - 100mm
- Ambient working temperature: (-)40°C to (+)55°C
- Bending Direction - Horizontal
- Incremental Order Length (Monochrome) - 83.3


Connectors

Direct Entry (DE)

Left Side Entry (SL)

Right Side Entry (SR)

Bottom Entry (BE)

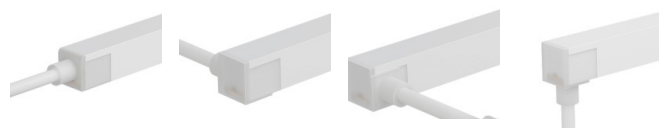


Mounting Accessories

Aluminium Profile



Flange Aluminium




Serrated Aluminium



Flange Serrated Aluminium



Bendable Serrated Aluminium



Pivot Bracket



Rotary Locking



Wall Mount




Recessed



Pendant Wire



Accessory Dimensions

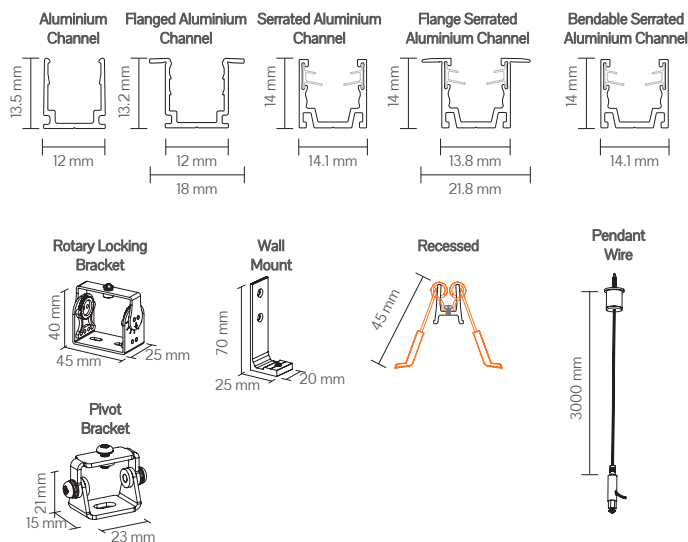

Code

Example:

PHHB1010 - 0580DEDO - 2400

Code	Wattage (W/m)		CRI		CCT			Connector		Driver		Length
	05	4.5	80	CRI>80	22	2200K	185	DE	Direct Entry	DO	Non-Dim	
PHHB1010	09	9	90	CRI>90###	27	2700K	210	SL	Left side entry	DA	DALI	-xxxx
					30	3000K	210	SR	Right side entry	CA	Casambi	
					35	3500K	210	BE	Bottom Entry	SW	Switch Dim	
					40	4000K	210			PH	Phase Dim	
					57	5700K	210					

Lumen/m figures based on CRI>80.

HAWKO Lighting reserve the right to change any data without notification.

CRI>90 only in 4.5W/m in 2700K, 3000K, 3500K, 4000K

If this fitting needs to be adjusted on site, contact FOS Lighting before cutting the product

HAWKO Lighting - Neon Flex Range - 2023