


HSVB1617




Key Features

- Minimum bend diameter - 300mm
- Ambient working temperature: MAX (+)95°C
- Bending Direction - Vertical
- Incremental Order Length (Monochrome) - 55.6mm
- Incremental Order Length (Tunable white) - 83.3mm
- Incremental Order Length (RGB / RGBW) - 83.3mm
- DMX/SPI Pixel Light options available on request


Mounting Accessories



Connectors

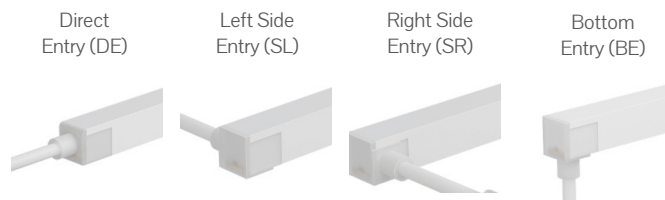

Accessory Dimensions

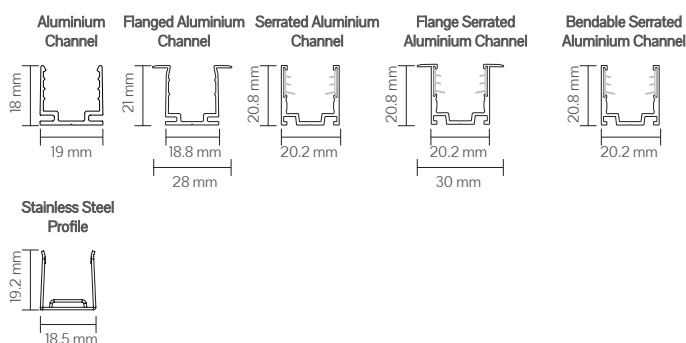

Code

Example:

HSVB1617 - 068022DEDO-2400

Code	Wattage (W/m)		CRI		CCT		lm/m	Connector		Driver		Length
HSVB1617	06	6W/m	80	CRI>80	22	2200K	330	DE	Direct Entry	DO	Non-Dim	-XXXX
					27	2700K	350	SL	Left side entry	DA	DALI	
					30	3000K	350	SR	Right side entry	CA	Casambi	
					35	3500K	350	BE	Bottom Entry	SW	Switch Dim	
					40	4000K	350			PH	Phase Dim	
					57	5700K	350			RC	2.4Ghz Remote Control	
					65	6500K	350					
					TW	2200K - 5700K						
					R2	RGBW (2700K)						
					R3	RGBW (3000K)						
					R4	RGBW (4000K)						
	05	4.5W/m			RGB	RGB						

Lumen/m figures based on, 6W, CRI>80. ## HAWKO Lighting reserve the right to change any data without notification.

If this fitting needs to be adjusted on site, contact FOS Lighting before cutting the product

HAWKO Lighting - Neon Flex Range - 2023